


Front Fender Replacement

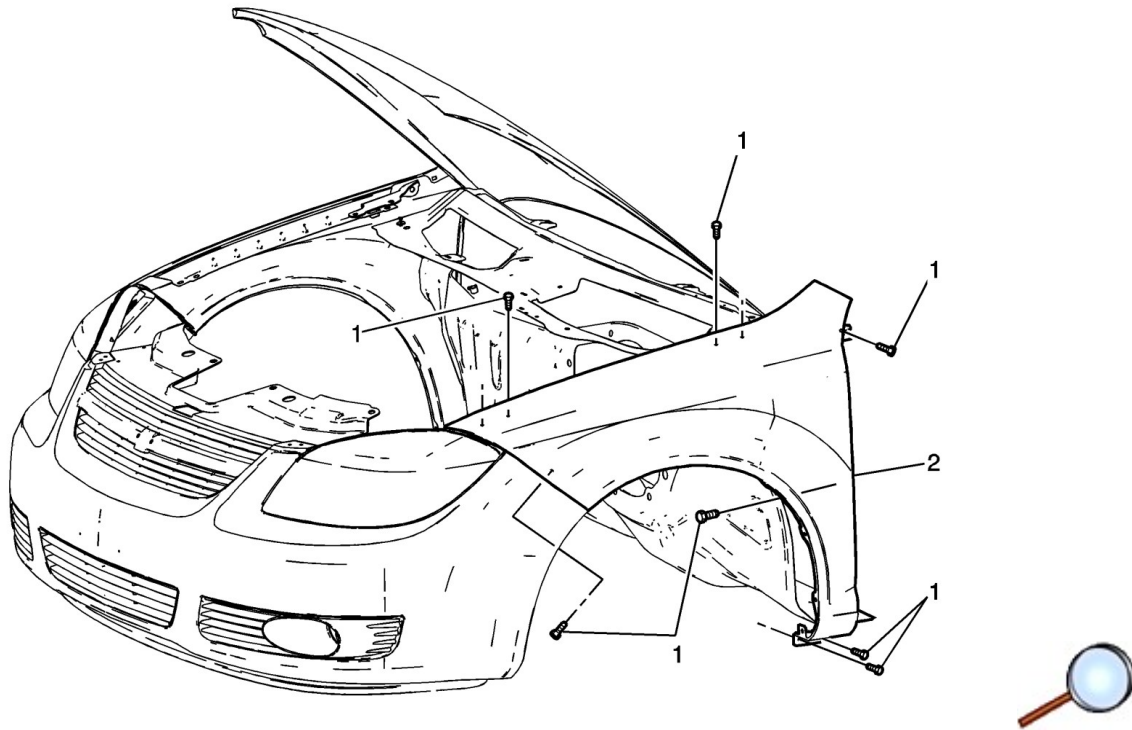

Front Fender Replacement

Callout	Component Name
<p>Preliminary Procedures</p> <ol style="list-style-type: none"> 1. Lift and support the vehicle. Refer to Lifting and Jacking the Vehicle. 2. Remove the tire and wheel assembly. Refer to Tire and Wheel Removal and Installation. 3. Remove the front fender liner. Refer to Front Fender Liner Replacement. 	
1	<p>Front Fender Bolts (Qty: 7) Notice: Refer to Fastener Notice. Tip: Apply tape along the door and the fascia edge to protect the paint. Tighten 10 N•m (89 lb in)</p>
2	<p>Front Fender</p>